


GSD 1 Door Standalone Fingerprint Switch



Main Features

- 1 Door
- 35 Users
- Door Monitoring via Door Contact
- Tamper Resistant
- Interlock
- Easy Programming
- Programmable Settings:
 - Programming Code
 - Relay Active Time
 - Scan Mode
 - Silent or Audible Operation
 - Keypad Backlight
- Indoor/Outdoor Use - IP 65
- Robust Polycarbonate Housing
- Mounts onto Standard Electrical Patress Box or flush mounts onto a wall
- 2 Year Warranty.

Wiring Layout

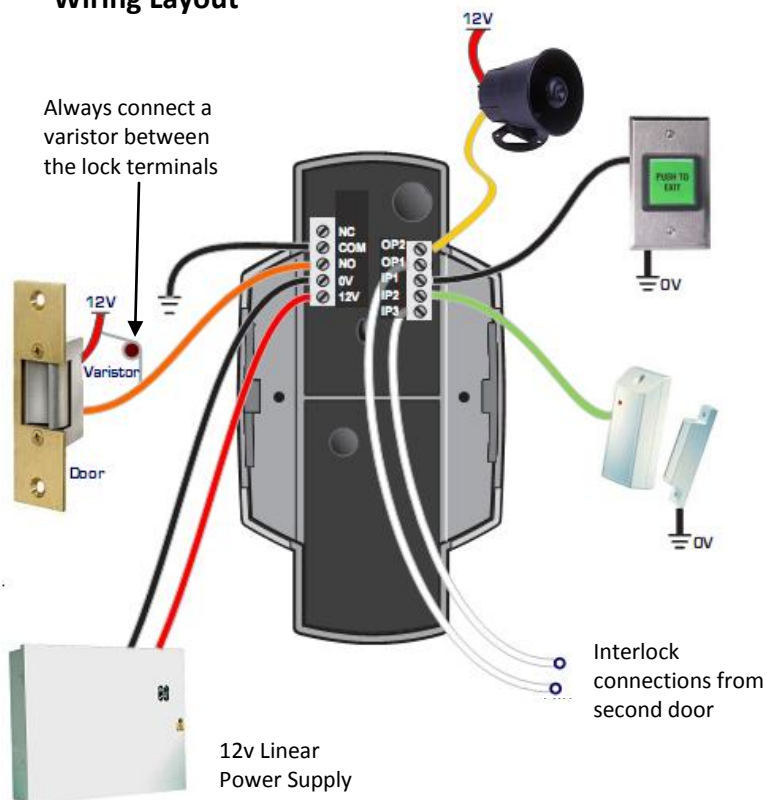

Technical Specification

- Power Supply 12V DC
- Current consumption 100mA
- Current consumption with load (max) 130mA
- Relay Contact Rating 5 Amps /240V ac
- Operating Temperature 0 C to +60 C
- Moisture Resistance IP 65

Dimensions

- Surface Mount **W.** 87mm **D.** 35mm **H.** 160mm